



■ AC Plug Type

AC plug type	2 pin Euro	2 pin USA	2 Pin China	3 pin UK	2 pin AU	2 pin JP	2 pin KR	2 pin IN	3 pin South Africa	Interchangeable
Shape No.	EU	US	CN	UK	AU	JP	KR	IN	/	yes

Insulation Class	Class I	Class I	Class II
AC inlet type	3 pole IEC320-C6	3 pole IEC320-C14	2 pole IEC320-C8
Shape No.	KRE072MPS-C6	KRE072MPS-C14	KRE072MPS-C8

■ Features

- Universal AC input Full range
- **IEC60601/EN60601/UL60601 Medical Grade**
- 2 pole US, EU, AU/NZ, EK, JP, CN, IN and 3 pole UK plug, Class II power unit
- No load power consumption < 0.1W
- **Medical 2 x MOPP**
- Energy efficiency Level VI
- Comply with EISA 2007 / DoE and NRCan
- Protections: Short circuit / Overload / Over voltage
- Fully enclosed plastic case
- Wide range working temperature

■ Applications

- Medical electronic devices
- Telecommunication devices
- Office facilities
- Industrial & Medical equipment



■ Description

KRE072MPS is a highly reliable, 72W wall-mounted, interchangeable and desktop styles single-output industrial & Medical adaptor series. This product is a class II power unit (no FG), and class I power unit (with FG) equipped with standard AC power plug, adopting the input range from 90VAC to 264VAC. The entire medical series supplies different models with output voltages ranging between 9VDC and 48VDC, 0 to 5.0A that can satisfy the demands for various types of medical electronic devices.

■ Characteristics

Input:

AC Input Voltage Rating

100 to 240VAC

AC Input Voltage Range

90 to 264VAC

AC Input Frequency

47 to 63Hz

Input Current

0.66A (RMS) maximum at 120VAC 0.25A (RMS) maximum at 240VAC

Touch Current

10uA maximum Medical grade

Inrush Current (Cold Start at ambient 25° C)

30A for 120VAC at maximum load

60A for 240VAC at maximum load

Input Power Saving

0.1W maximum at no load

Output: Efficiency

Meet energy saving efficiency level VI.

Hold-up Time

10mS minimum at 120VAC and maximum load

Short-Circuit Protection

Auto restart

Environmental Temperature

Operation 0 to +40° C

Non-operation -40 to +85° C

Humidity 10-90% non-condensing

Emissions

Complies with FCC Class B Complies with EN55011 Class B

ESD Immunity ±8kV contact / ±15kV air

Immunity

AN/NZS CISPR22

EN55011

EN60601-1-11 Level EN61000-4-3 Level

EN61000-4-4 Level EN61000-4-5 Level

EN61000-4-6 Level EN61000-4-8 Level

EN61000-4-11 Level EN61000-3-2 Level

EN61000-3-3 Level GB9254+GB1762

Dielectric Withstand (Hi-pot) Test Primary to Secondary:

2 x MOPP (4560VACx2)

3500V AC for 1 min., 10mA

Primary to F.G.: 1500V AC for 1 min., 10mA

DC Output Connector

2.1 x 5.5mm Center Positive+ Standard or equivalent,

Or see *KRE-connectors-Spec.pdf*

Output Cable

1.5 meter (4.92 feet), UL2468, from 24-18AWG guage or equivalent

Mating Connector

Equivalent



■ Model list and Output Specifications

KRECO P/N (see note)	DC Output Voltage	Load		Output Power	Safety Approvals	Energy Saving Level	Standards
		Min	Max				
KRE072MPS- xxxxyyZD	9.0- 15V	0.01A	6.0A	72W max.	CCC/CQC,UL/CUL/FCC,CE/GS/EMC,R CM,TUV/BS1363,EK,PSE	V&VI	EN/IEC60601
	15.1- 48V	0.01A	4.76A	72W max.	CCC/CQC,UL/CUL/FCC,CE/GS/EMC,R CM,TUV/BS1363,EK,PSE	V&VI	EN/IEC60601
	9.0- 15V	0.01A	6.0A	72W max.	CCC/CQC	V&VI	GB4943/8898/4706
	15.1- 48V	0.01A	4.76A	72W max.	CCC/CQC	V&VI	GB4943/8898/4706
	9.0- 15V	0.01A	6.0A	72W max.	BSMI	V&VI	
	15.1- 48V	0.01A	4.76A	72W max.	CE/GS/EMC,TUV/BS1363	V&VI	EN/IEC60335/61558
	9.0- 15V	0.01A	6.0A	72W max.	CE/GS/EMC,TUV/BS1363	V&VI	EN/IEC60335/61558
	15.1- 48V	0.01A	4.76A	72W max.	CE/GS/EMC,TUV/BS1363	V&VI	EN/IEC60335/61558

KRECO
 intelligent power solutions



■ Dimension Diagram for KRE072MPS-UK plug

Unit: mm

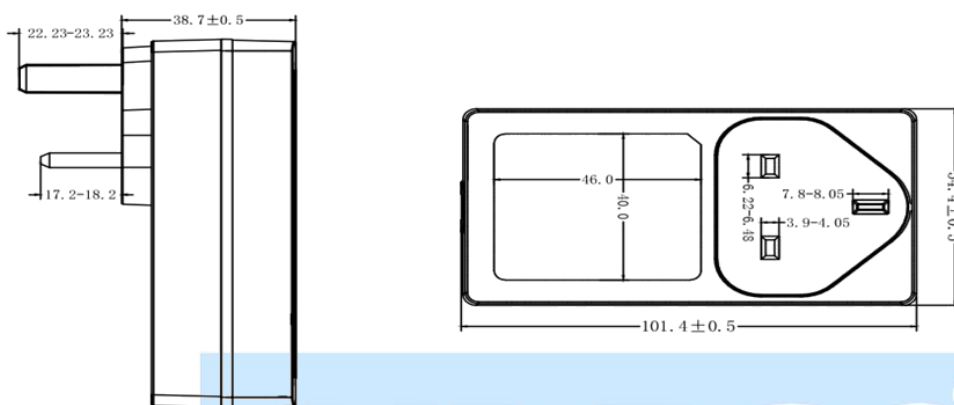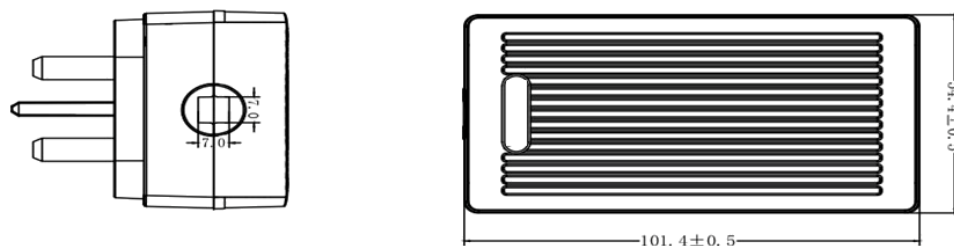


■ Dimension Diagram for KRE072MPS-AU plug

Unit: mm

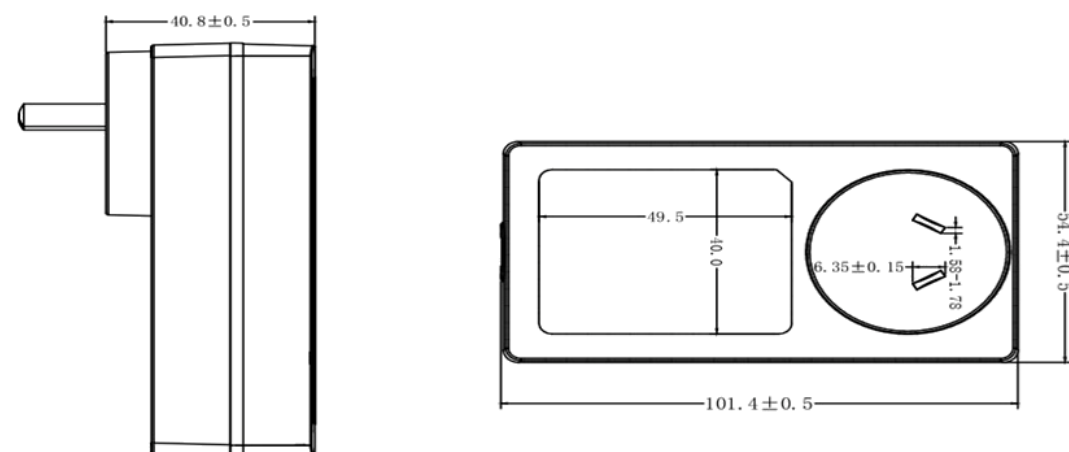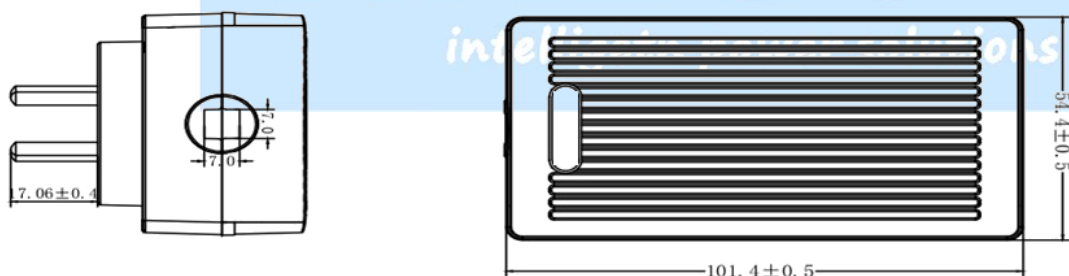


■ Dimension Diagram for KRE072MPS-EU plug

Unit: mm

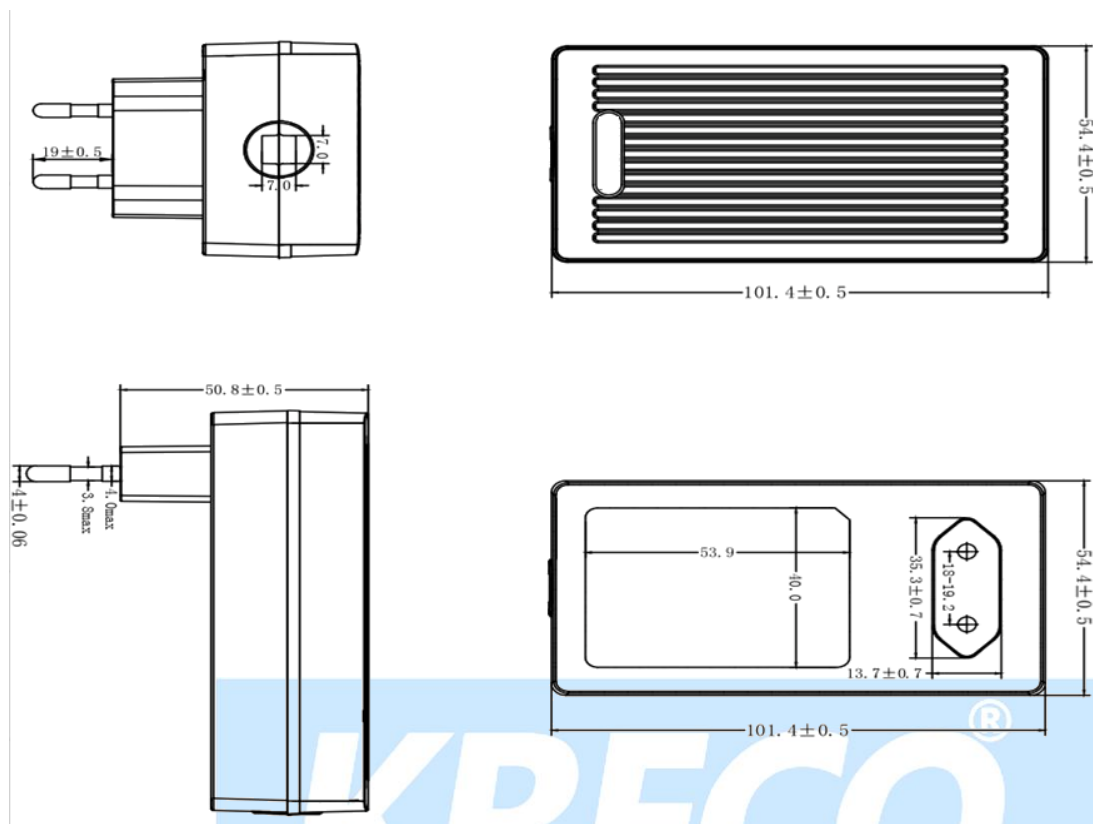

■ Dimension Diagram for KRE072MPS-US plug

Unit: mm

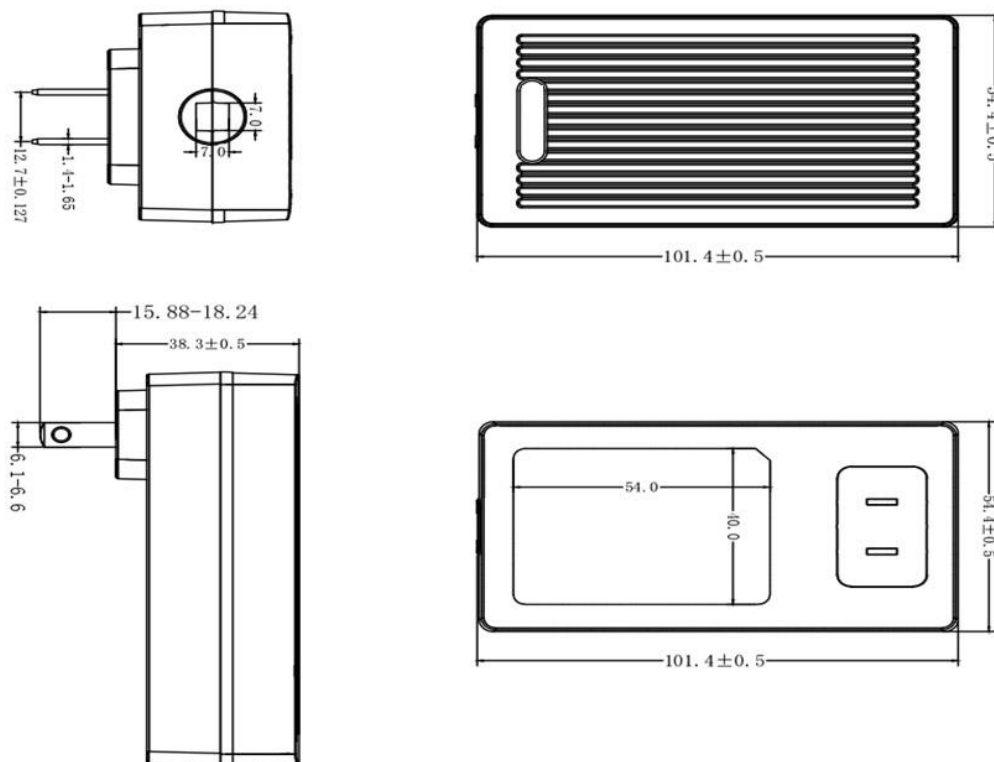

- (1) I for Interchangeable version, normally include EU, UK, US, AU version plugs, more plug type could be re-designed, or added to production order.
- (2) xxx for Output voltage and yyyy for output current, what you are going to order, please must specify to sales.
- (3) Safety model number differs from the order number, part number, and shape number as per respective OEM/ODM factories.

Kreco is not responsible for any error, and reserves the right to make changes without notice. Please visit our website at www.kreco.com.cn for the most up-to-date specifications and contact information.

